

GFT-105-Touch Matrix Membrane Keyboard

With integrated capacitive touchpad.




Description



Features

-
-
-
-
- Dust- and contaminant-proof according to DIN [IP65](#) on the front ([NEMA 4](#))
- The key mechanics of the GFT-[105](#) is based on 11 mm metal dome including gold contacts, as well as a 16 mm key pitch

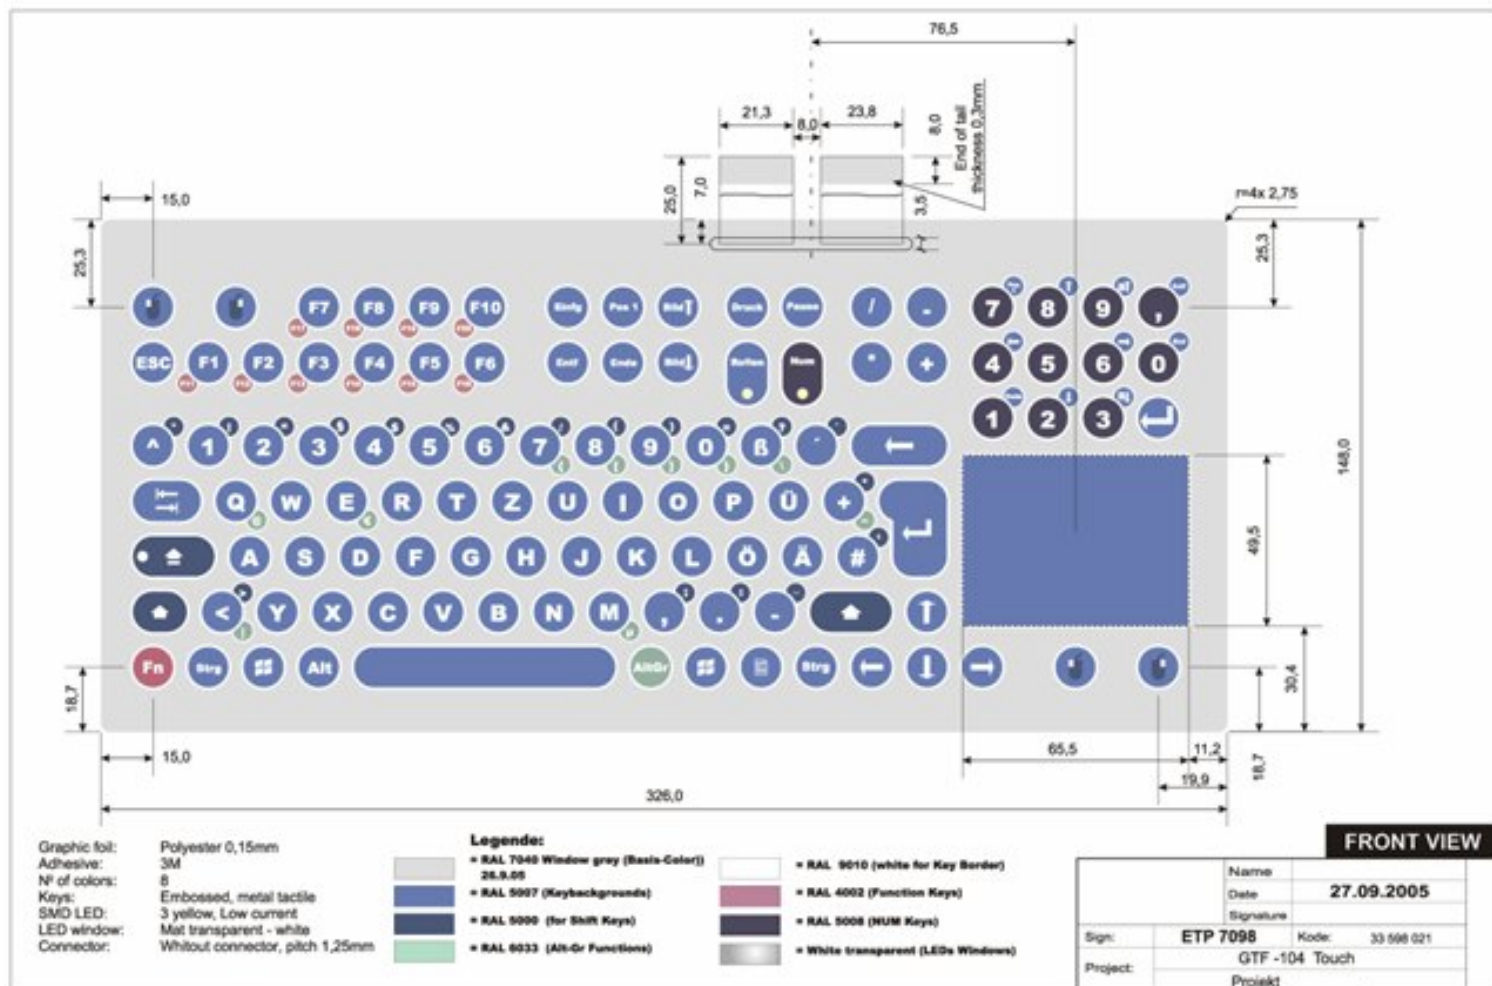

Specification

Mechanical data

Housing: selfadhesive front foil
 Degree of Protection: [IP65](#)
 Dimensions: 326 x 148 x 1,25 mm

Keys

Number of Keys: [105](#) or 104
 Keyboard Layout: German or Swiss or US
 Operational Life: 1 mio. keystrokes min.
 Actuation Force: 2 N
 Stroke Travel: 0,3 mm
 Key Legend: silk screen

Electric Data

Interface: Matrix
 Operating Voltage: 5 V
 Operating Current: 4 mA

Environment

Operating Temperature: from -20 °C to +70 °C


Guarantee

Certifications: CE





Order No.	Article	
KF1299	GFT-105-Touch-Matrix-Ger	Matrix, German
KF1315	GFT-105-Touch-Matrix-US	Matrix, US
KF1308	GFT-105-Touch-Matrix-Schweiz	Matrix, Swiss

Accessories

Order No.	Article	
ZK1374	Anschlusskabel-2xPS/2	Anschlusskabel-2xPS/2
ZK1364	Anschlusskabel USB	
CS1111	GCK-990-STD-PS/2-USB	
TT1024	STP-1-PS/2	PS/2



Links

Clickt	Titel
	GFT-Series - Membrane Keyboards for Industrial Applications Tailor-made Keyboard Solutions especially for industrial purposes.
	GFT-105-T-Touch-PS/2-Ger Waferthin and Shock-Resistant Membrane Keyboard with integrated Touchpad.
	Award-winning: Innovation Award 2006 for GeBE GFT-Series has won within the category hardware
	GFT-105-Antibac-Touch Tabletop Version ANTIBACTERIAL, Waferthin and Shock-Resistant Membrane Keyboard with integrated Touchpad.

sales@tastaturen.com **Telefon:** (0 81 42) 66 95 8-0 **Fax:** (0 81 42) 66 95 8-11