


**GFT-104 built in version****Description****Flat and Stable**

In order to complete the development of the GFT Series, GeBE Computer & PerIPherie GmbH took a step forward: The robust and colorful foils were laminated onto the front plate, milled out of aluminium. The colorful [Design](#)ed foil is nearly as much flat as a beer mat and due to the rear-mounted studs ideal for integration into consoles with a small depth. The keyboard controller GCK-990 offers the customers a wide range of customized solutions: The user can feel free to exclusively decide about color of the keys, individual [Programming](#) as well as [PS/2](#) or [USB](#) interface.

The front-panel-versions of the GFT-104/105 series is suited for the use in switchboards and user terminals in the areas automatic production, chemistry, laboratory and medical technology as well as in the environment of information systems.

**Features:**

The german and US layouts are standard. Other country versions, as well as customized adjustments are available on request.

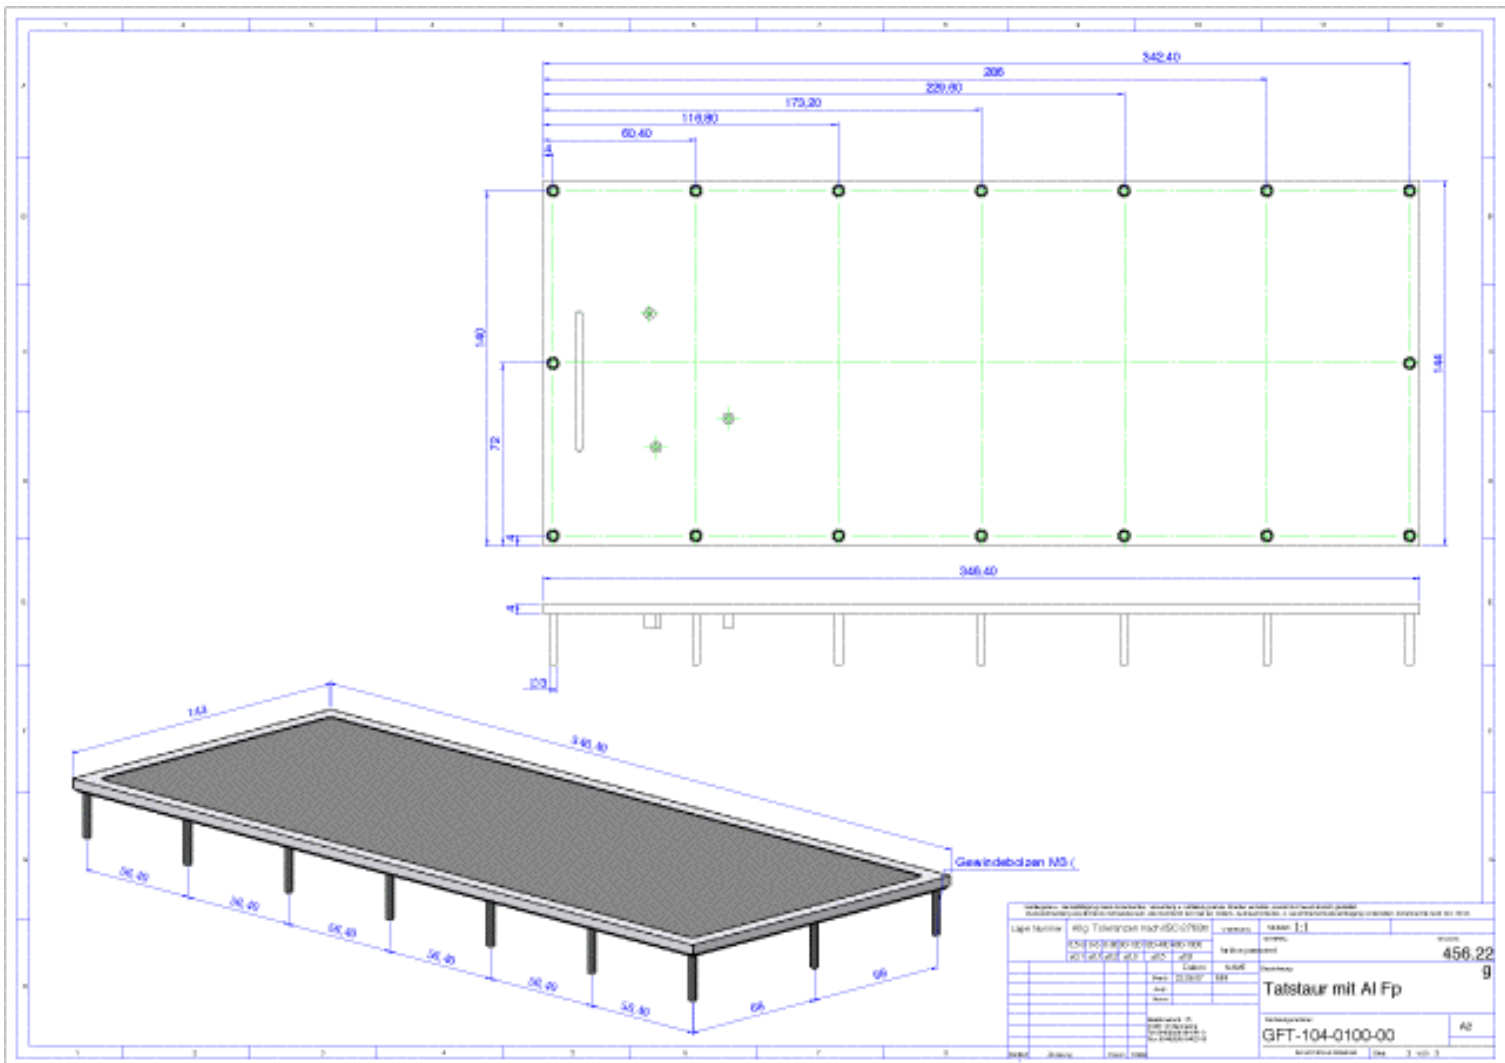

## Specification

### Mechanical data

Housing:	Built-in module
Housing:	Aluminium
Degree of Protection:	<a href="#">IP65</a> on front
Color:	aluminium
Dimensions:	346,40 x 144 x 15 mm
Cable Length:	180 cm

### Keys

Key Technology:	metal dome
Number of Keys:	104
Keyboard Layout:	German or US

Operational Life: 1 mio. keystrokes min.  
Actuation Force: 0,2 N  
Stroke Travel: 0,3 mm  
Key Legend: silk screen

---

**Electric Data**

Interface: [PS/2](#) or [USB](#)  
Operating Voltage: 5 V  
Operating Current: 4 mA

---

**Environment**

Operating Temperature: from 0 °C to +70 °C

---

**Guarantee**

Certifications: CE

---

Order No.	Article	
KF1344	GFT-104-Front-PS/2-Ger	PS/2, German
KF1345	GFT-104-Front-PS/2-US	PS/2, US
KF1347	GFT-104-Front-USB-Ger	PS/2, Deutsch
KF1346	GFT-104-Front-USB-US	USB, US

[sales@tastaturen.com](mailto:sales@tastaturen.com) **Telefon: (089) 89 43 99-0 Fax: (089) 89 43 99-11**