
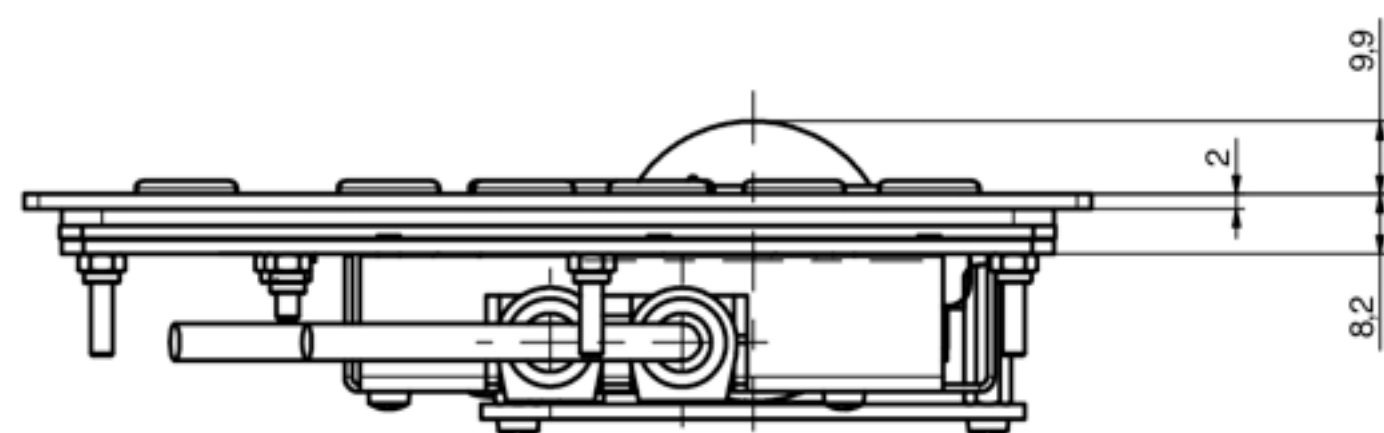


KVS-E90 Front Track USB

tastaturen.com®

A GeBE COMPANY


www.tastaturen.com

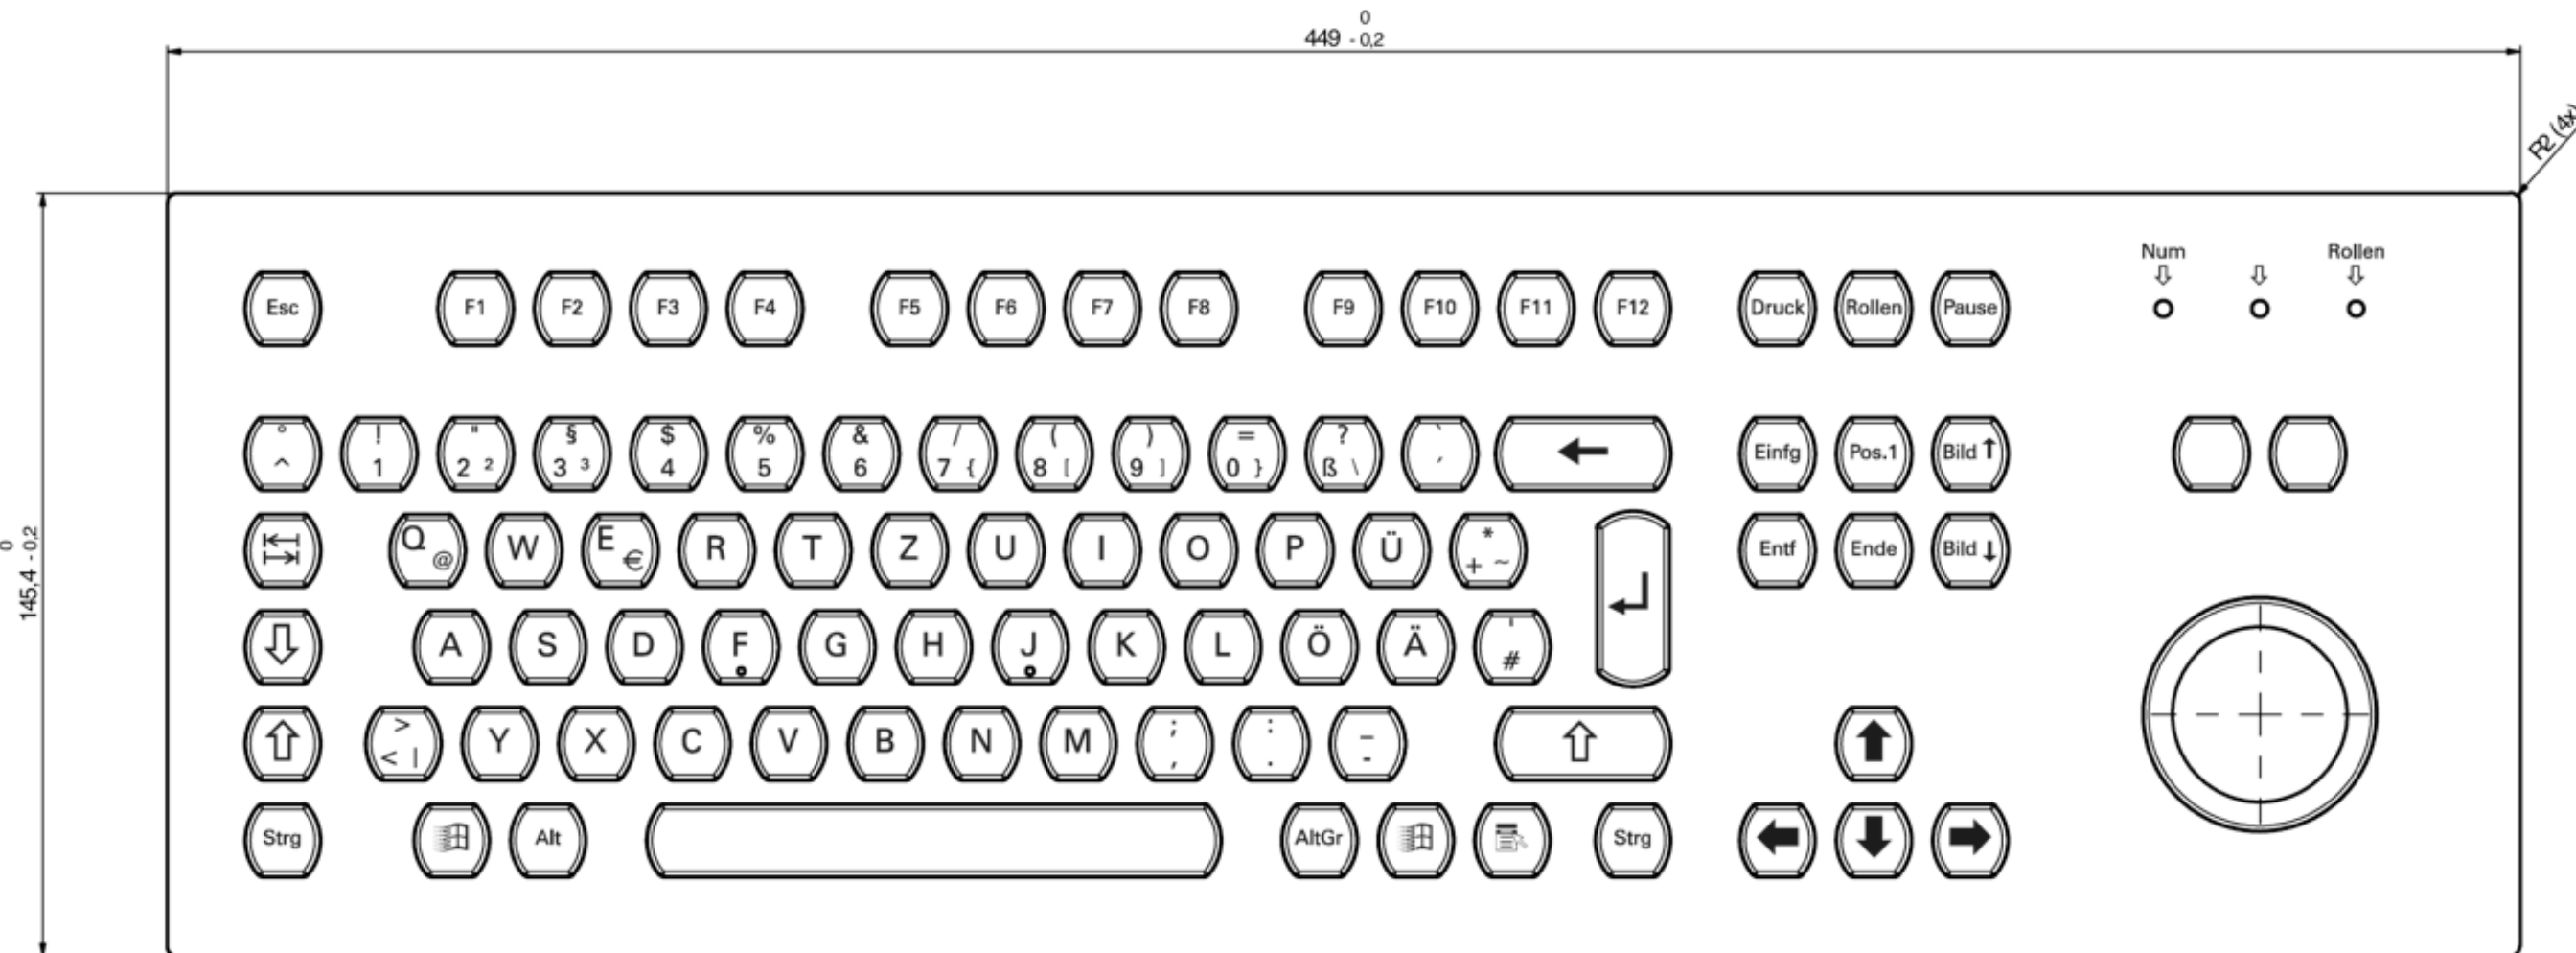

Frontplatte: Edelstahl, gebürstet, 2 mm dick
Tastenkappen: Edelstahl, gebürstet
Tastenbeschriftung: Laser (Mikrogravur)
erhabene Fühlwarze auf Taste F und J Schrift:
Univers 55, Versalhöhe 4,5 mm / 3,5 mm
Schutzart: IP65 (frontseitig) für Tasten
Tastenhub: 1,6 mm
Tastenüberstand: ca. 1,8 mm
Betätigungskraft: ca. 0,9 N, mit Druckpunkt
Lebensdauer Einzeltaste: > 10⁷ Betätigungen
Tastengeraster: 18,4 mm
Technologie: Silikonmatte mit Karbonkontakt
Schnittstelle: USB
Anschlußkabel: Länge: 2 m
Stecker: USB Stecker Typ A
Einbau: frontseitig
Abdichtung kundenseitig, Dichtband liegt bei
Verschraubung an 14 Gewindebolzen M3

Trackball:
Durchmesser: 38 mm
Kugel: Kunststoff
Schutzart: IP 54, IP65 statisch

KVS-E90 Front Track USB

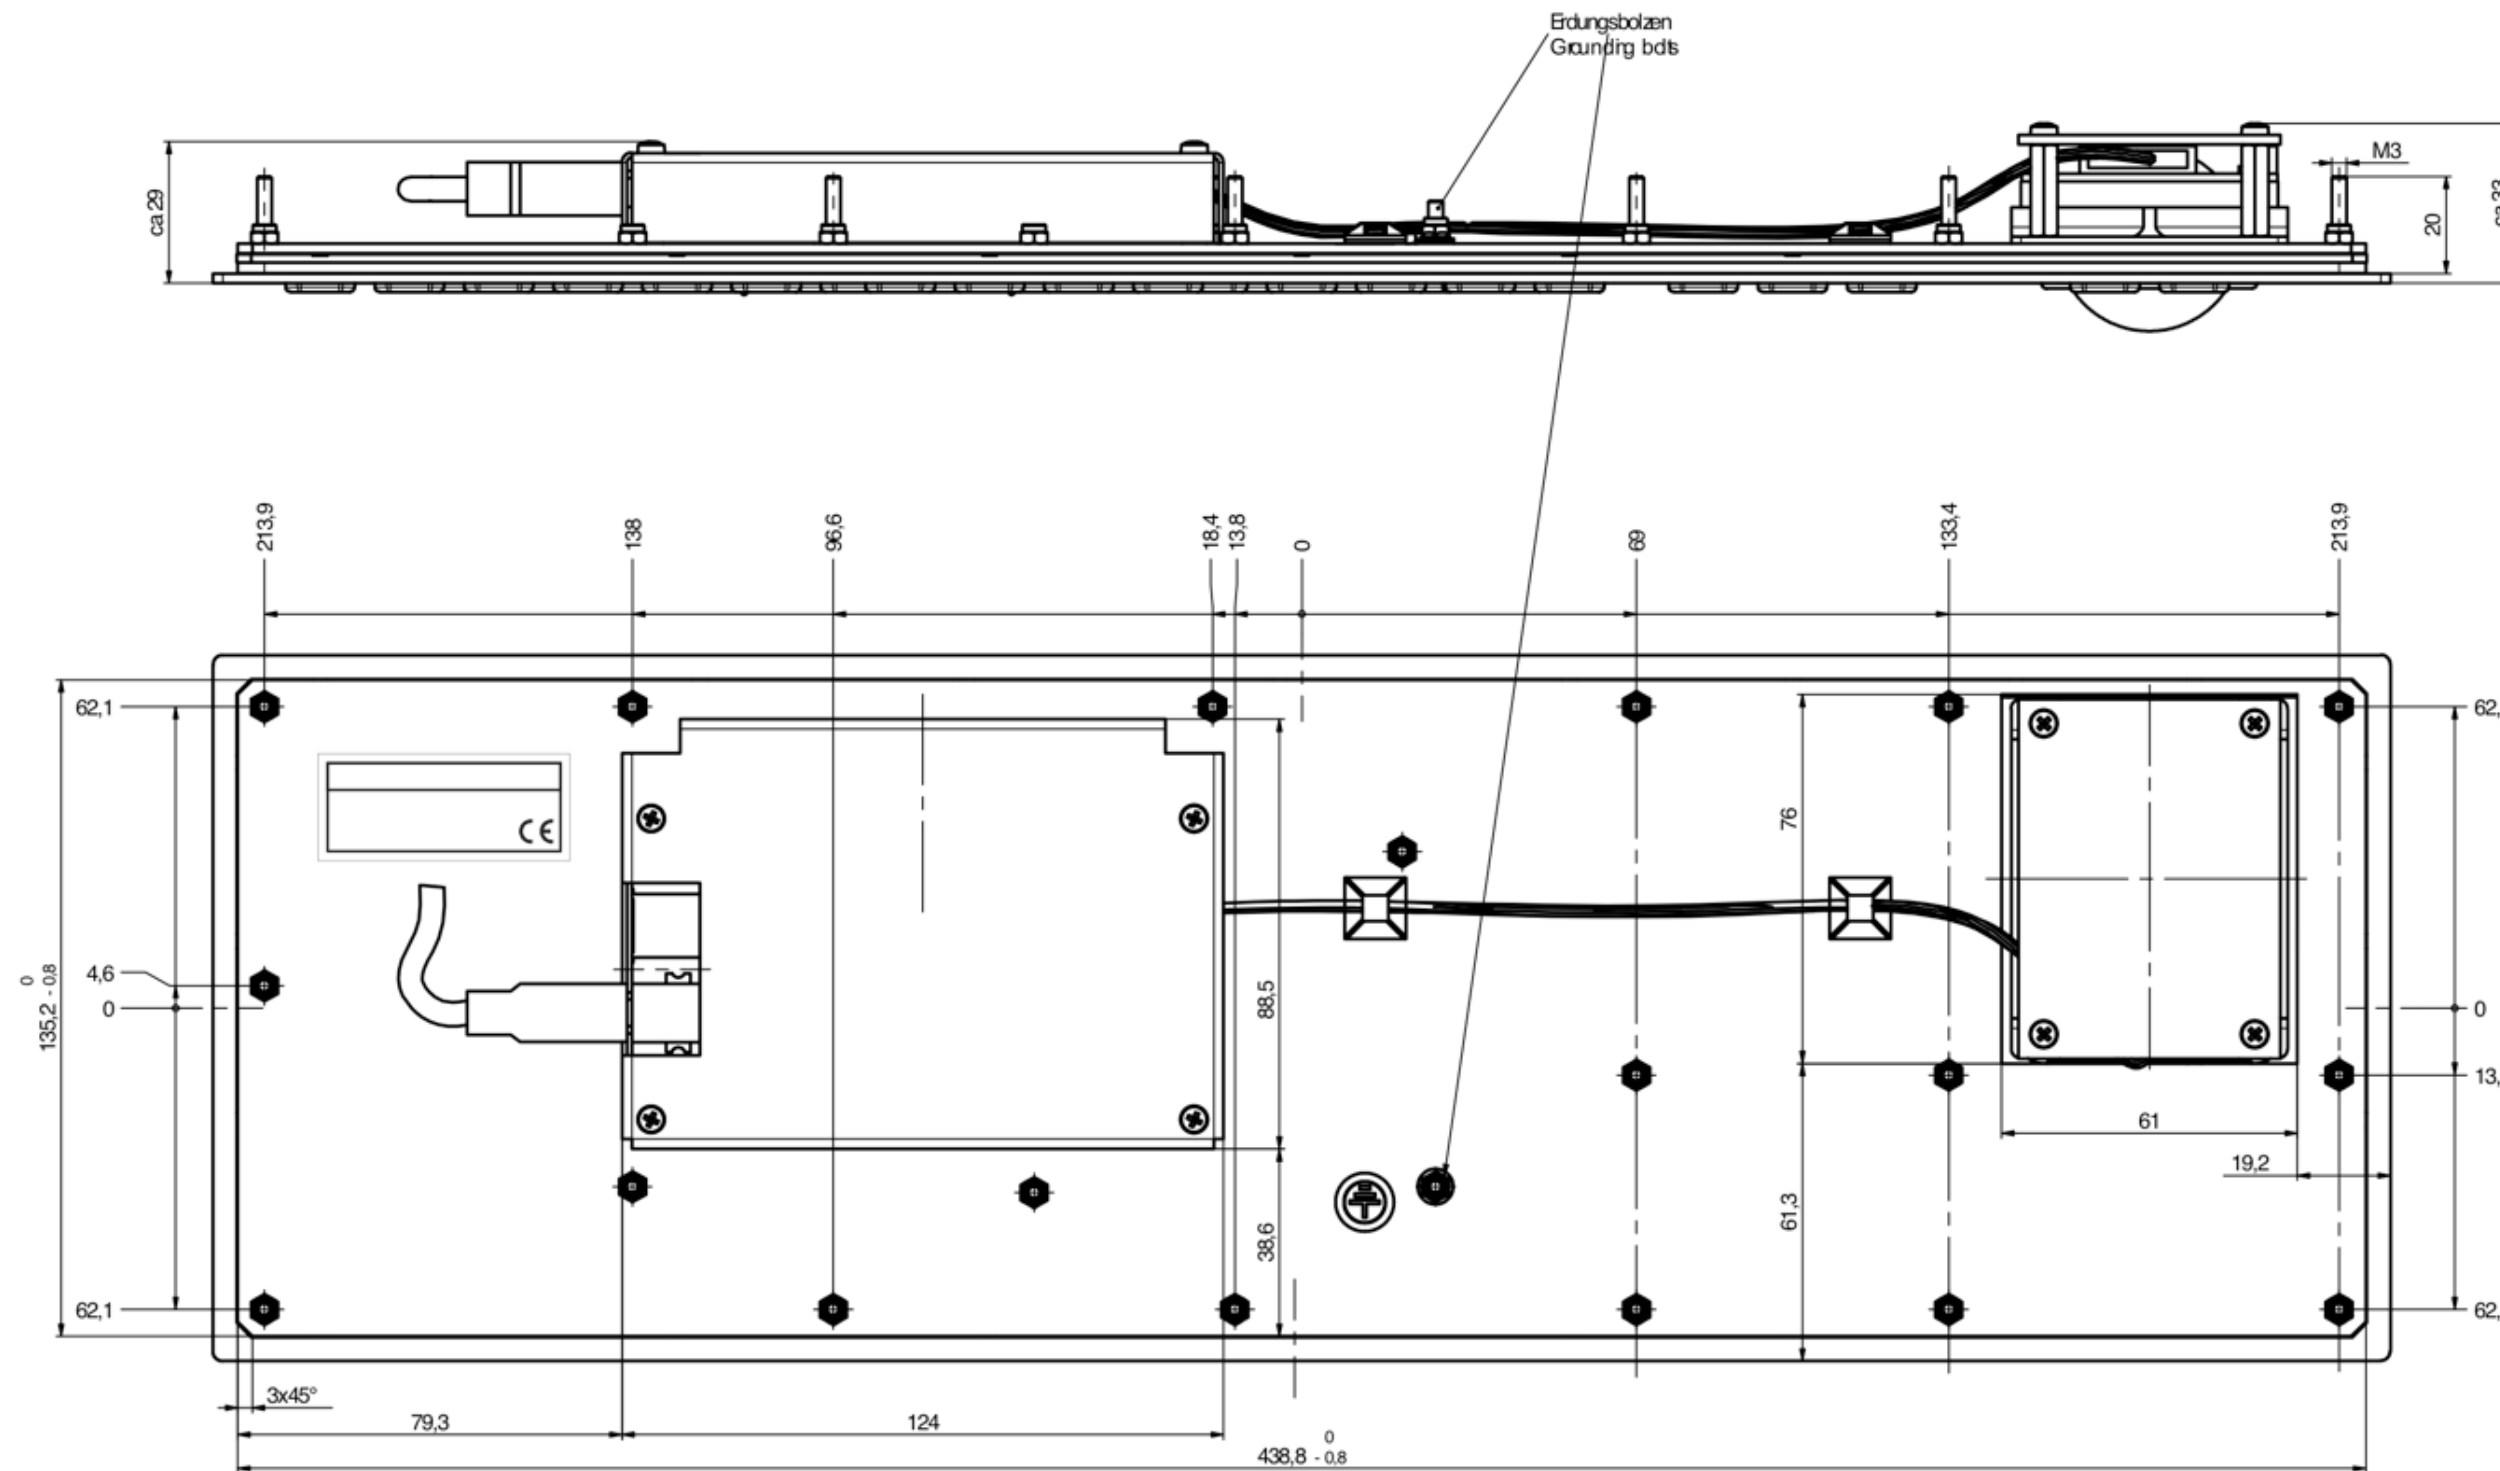

- Frontplate: Stainless steel 2 mm, brushed
- Keytops: Stainless-steel, brushed
- Key lettering: Laser (micro engraving)
- Raised markings on key F and J
- Lettering: Univers 55, Height 4.5 mm / 3.5 mm
- Protection class: IP65 front
- Key travel: 1.6 mm
- Key overlap: 1.8 mm
- Switching cycles 1fold keys: > 10⁷ operations
- Operation force: ca. 0.9 N
- Key grid: 18.4 mm
- Technology: Silicon rubber with carbon contact
- Interface: USB
- Connection cable: Length 2 m
- Connector: USB, Typ A
- Mounting: Front panel
- Sealing by the customer, sealing enclosed
- Mounting: 14 threaded bolts

- Trackball:
 - Diameter: 38 mm
 - Ball: Phenolic
 - Protection class: IP 54, IP 65 static